

MEASURING GUIDE

Follow these simple guidelines to get the perfect fit for your sliding wardrobe doors.

1. Height preparation

It is very important that you take accurate measurements before ordering your sliding wardrobe doors. Use a spirit level to check the ceiling and floor levels. If the floor is uneven, the doors may slide unintentionally!

Our optional bottom and top liners will allow you to level up to 15mm using packers (not supplied). If carpet is fitted compress it down as much as possible; you can lay the bottom track and liner onto carpet.


Unlike other systems our sliding wardrobes are not limited to maximum height meaning that you can have full floor to ceiling wardrobes on any height opening (not available on the Como Collection). Alternatively, you can build a bulkhead to drop the height of the wardrobe down.

Our sliding wardrobe systems are bottom rolling, using ball bearing bottom rollers with twin wheel top guides. There is no load bearing on the ceiling.

2. Measuring height

The top track system will accommodate up to 15mm in height difference. Measure in at least three places - the centre and both ends eg. at **A**, **B** and **C**.

IMPORTANT - Use the smallest measurement when supplying us with height measurements.

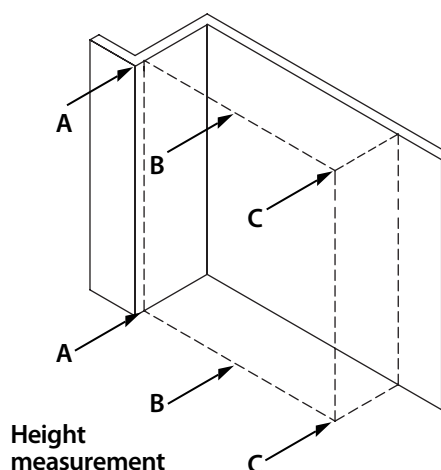


3. Measuring width

Check the walls with a spirit level to see if they bow or curve. Our optional strike plate will allow you to level up to 15mm using packers (not supplied). If you have coving and skirting you will need to remove a section of them to slide the strike plate in before installing. Measure in two places top and bottom. Please ensure you measure **(A)** above any skirting board and **(B)** below any coving that may hinder wardrobe installation.

IMPORTANT - Use the narrowest measurement when supplying us with width measurements.

NOTE - both top and bottom tracks are supplied over length to allow you to trim them to exact requirements.

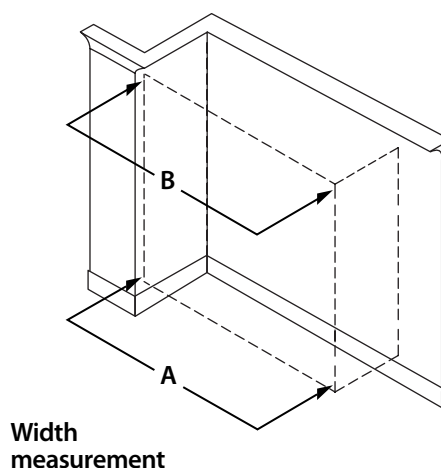


4. Wall to end panels

If your opening can't go from wall to wall because of obstructions such as a door, use an end panel. This can be cut to size and very simply attached to the wall using fixing blocks or timber battening (not supplied).

IMPORTANT - In the case of wall to end panel measure the dimension from the inner wall to the outside position for the proposed end panel.

NOTE - The end panels are 640mm deep. If an end panel is used there is no need for a strike plate.

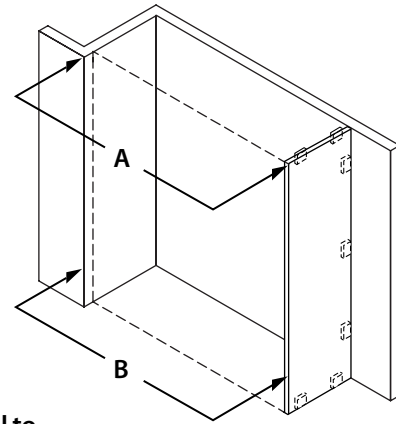


Wall to end panels

5. End panel to end panel

IMPORTANT - Measure the dimension from outside points of both end panels.

NOTE - The end panels are 640mm deep. If an end panel is used there is no need for a strike plate.

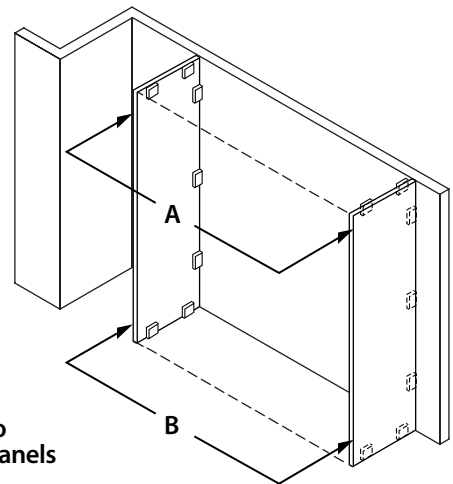

End to end panels

6. General information

REMEMBER YOU ARE MEASURING APERTURE SIZES, NOT DOOR SIZES.

When giving us the measurements enter the smallest width dimensions and the smallest height dimensions.

IMPORTANT - When measuring **do not** allow for the thickness of strike plates, liners or end panels. If these items have been included in the order, we will automatically calculate the correct width of the aperture.

However, if you are installing your own liners to level up the aperture you must measure the aperture within your installed sections and as you will not be including strike plates, liner or end panels within the order we will not reduce the measurements.

Normal overlap on the doors is 35 - 40mm.

WARDROB[™]
DOORS DIRECT

The information provided herein is intended as a guide to good practice. Wardrobe Doors Direct cannot be held responsible or liable for any damage, wear or malfunction caused to components due to inadequate or improper installation.

Wardrobe Doors Direct
Office: 6 Gawthorpe Avenue, Bingley, West Yorkshire BD16 4DG
Freephone: 0800 035 1730 Email: info@wardrobedoorsdirect.co.uk

www.wardrobedoorsdirect.co.uk

Wardrobe Doors Direct is a trading style of Ichicoo Ltd.